



Fresa de roscar de un paso para rosca interior
 Single tooth thread mill for internal thread
 Fraise à fileter, un filet, pour filetage intérieur
 Fresa a filettare un passo per filettatura interna
 Gewindefräser einschneidig für Innengewinde



1,5xD
2xD



3xD

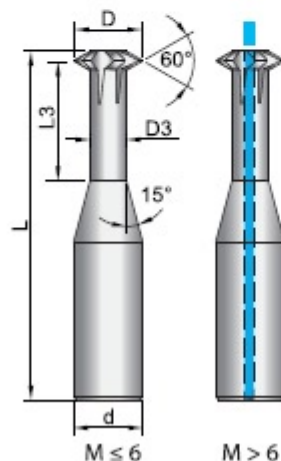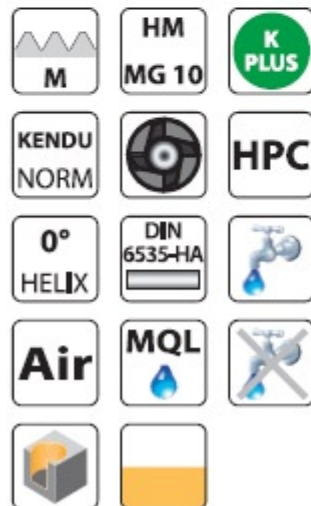

Acero Steel <1400N/mm ²	Inox Stainless	Fundición Cast iron	ALU Mg	Cu	Materiales sintéticos Fiber	Grafito Graphite	Ti	Ni	Acero Steel 45-50 HRc	Acero Steel 50-70 HRc
☉		☉	☺		☺	☺	☺	☺	☺	☉

D	d	L	Z	L3	M	P	RM01.61.
±0,02	h6						
1,5	3	39	4	4	M2	0,4	00150
1,9	3	39	5	6	M2,5	0,45	00190
2,4	3	39	5	6	M3	0,5	00240
3,2	4	40	6	8	M4	0,7	00320
4,1	6	50	6	10	M5	0,8	00410
4,9	6	50	6	12	M6	1	00490

D	d	L	Z	L3	M	P	RM02.61.
±0,02	h6						
6,5	8	63	5	25	M8	1,25	00650
8,2	10	72	5	30	M10	1,5	00820
9,8	10	79	5	36	M12	1,75	00950